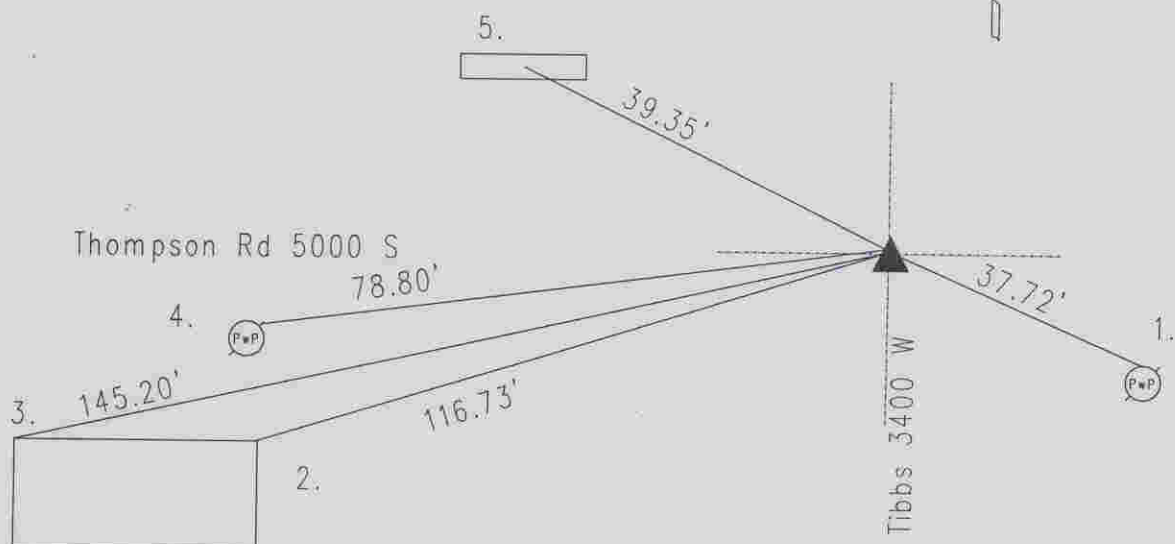


$$E: 52912.6650(\text{m})$$


Original post set 1820 by Laughlin with witnesses; 6' hornbeam N 78 E 19 links; 10" buckeye N 86 W 12 links per Marion County Atlas pg. 5. Mayhew 3-19-1858 called no stone but witness: 36" walnut S 4 1/2 W 88 links per Perry Township Legal Survey Book pg. 35. Mason 12-28-37 called a railroad spike. Monroe 3-4-61 called the same. McLand 4-13-72 called the same. Miller 6-6-75 called same. Gries 12-20-88 called the same. Wilcoxon 1-31-95 called the same. Whiteside 5-14-97 called the same. Wilcoxon excavated 5-14-97 and railroad spike found 4" down. No stone found during excavation. Harrison set 11-24-97. Re-tied 12-20-01 by Wilcoxon.

14030401

REF.	DISTANCE	DESCRIPTION
1.	37.72'	PK nail N PwP#94-690 10"up
2.	116.73'	NE corner of ADDRESS 5010
3.	145.20'	NW corner of ADDRESS 5010
4.	78.80'	PK nail w/shiner N PwP#203-689 24"up
5.	39.35'	Cut 'x' center of concrete headwall